

### **SPECIFICATIONS**

### I-Purge<sup>®</sup>X Modular Inflatable System (Sold as a Complete System)

ITEM NO.	MINIMUM	MINIMUM DIAMETER		MAXIMUM DIAMETER		RNESS LENGTH	DESCRIPTION
ENGLI ENGLI	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	DESCRIPTION
XABLD 2-3	2"	51 mm	3"	76 mm	11"	279 mm	2-3" I-PurgeX Expandable Double Purge
ADLD 2-0	2						Bag System with High Heat Harness
XABLD 4-6	4"	102 mm	6"	152 mm	11"	279 mm	4-6" I-PurgeX Expandable Double Purge
ABLD 4-0	ABLD 4-0 4 102 mm 0	0	0 152 1111		2191111	Bag System with High Heat Harness	
XABLD 8-12	8"	8" 203 mm	12"	305 mm	11"	279 mm	8-12" I-PurgeX Expandable Double Purge
ADLD 0-12	12 0 20311111 12 30311111 11 27311111	2/9/1111	Bag System with High Heat Harness				
XABLD 14-18	14"	356 mm	18"	457 mm	16"	406 mm	14-18" I-PurgeX Expandable Double Purge
ADLD 14-10	14	330 11111	10	437 11111	10		Bag System with High Heat Harness
XABLD 20-26	20"	509 mm	26"	660 mm	18"	457 mm	20-26" I-PurgeX Expandable Double Purge
ABLD 20-20	20	509 mm	20	000 11111	10		Bag System with High Heat Harness
XABLD 28-36 28	28"	711 mm	36"	914 mm	20"	509 mm	28-36" I-PurgeX Expandable Double Purge
	20	7 1 1 11111					Bag System with High Heat Harness
XABLD 38-48	38"	965 mm	48"	1219 mm	36"	914 mm	38-48" I-PurgeX Expandable Double Purge
ADLD 30-40							Bag System with High Heat Harness

# I-PurgeX Isolator®

ITEM NO.	DIME	NSIONS	DESCRIPTION		
TIEWINO.	ENGLISH	METRIC	DESCRIPTION		
XISO 2-3	2-3"	51-76 mm	2-3" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve		
XISO 4-6	4-6"	102-152 mm	4-6" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve		
XISO 8-12	8-12"	203-305 mm	8-12" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve		
XISO 14-18	14-18"	356-457 mm	14-18" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve		
XISO 20-26	20-26"	509-660 mm	20-26" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve		
XISO 28-36	28-36"	711-914 mm	28-36" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve		
XISO 38-48	38-48"	965-1219 mm	38-48" I-PurgeX Isolator One-Sided Plug with 10' Hose and Valve		

### I-Purge<sup>®</sup>X Modular System Components (Sold as Separate Parts)

ITEM NO. MODULE A	ITEM NO. MODULE B	DIME	INSIONS	DESCRIPTION
TIEMINO. MODULE A	TIEM NO. MODULE B	ENGLISH	METRIC	DESCRIPTION
XABLD-2 MOD-A	XABLD-2 MOD-B	2"	51 mm	2" I-PurgeX Module A or B
XABLD-4 MOD-A	XABLD-4 MOD-B	4"	102 mm	4" I-PurgeX Module A or B
XABLD-8 MOD-A	XABLD-8 MOD-B	8"	203 mm	8" I-Purge <b>X</b> Module A or B
XABLD-14 MOD-A	XABLD-14 MOD-B	14"	356 mm	14" I-PurgeX Module A or B
XABLD-20 MOD-A	XABLD-20 MOD-B	20"	509 mm	20" I-PurgeX Module A or B
XABLD-28 MOD-A	XABLD-28 MOD-B	28"	711 mm	28" I-PurgeX Module A or B
XABLD-38 MOD-A	XABLD-38 MOD-B	38"	965 mm	38" I-Purge <b>X</b> Module A or B

### Accessory Components Optional Harness Lengths

ITEM NO.	DIME	ENSIONS	DESCRIPTION	
TEMINO.	ENGLISH	METRIC	DESCRIPTION	
ABLD-ELH-24	24"	610 mm	24" (2') Extended Length High Heat Harness	
ABLD-ELH-36	36"	914 mm	36" (3') Extended Length High Heat Harness	
ABLD-ELH-48	48"	1219 mm	48" (4') Extended Length High Heat Harness	
ABLD-ELH-72	72"	1828 mm	72" (6') Extended Length High Heat Harness	
ABLD-ELH-CUSTOM	Any Size	Any Size	Custom Lengths Available Upon Request	
ABLD-CNADP	NA	NA	1/4" Female MPT to 1/4" Female BSPP Conversion	

For additional product information, quotations and ordering, please contact:

**Aquasol Corporation** 

80 Thompson Street N. Tonawanda, NY 14120 USA

Toll Free: 1.800.564.WELD (9353) Phone: 716.564.8888 Fax: 716.564.8889


Email: info@aquasolcorporation.com aquasolwelding.com

Distributed By:

SUPERTECH SERVICES PVT. LTD.

Plot :- A253, Road 30B, Wagle Industrial Estate, Thane (West), Maharashtra, India. Tel :- +91 91360 97134 / +91 91360 97135 Email :- ssl@supertechservices.in For more information visit us at : www.supertechservices.in

### **American Welding Society** Sustaining Company Member



I-PurgeX MODULAR INFLATABLE BLADDER SYSTEM

8"-12"

-PurgeX

8"-12"

I-PurgeX

8"-12"

I-PurgeX

FLOW RATE 10 CFH 15 LPM QUASOLWELDI


**US & FOREIGN PATENTS ISSUED & PENDING** CE APPROVED

ALL NEW EXPANDABLE & EXTENDABLE **MODULAR SYSTEM** 

# I-PURGE<sup>®</sup>X REDUCER

**Combine Pipes of Different Diameters** to Create a **Unique Configuration** 







aquasolwelding.com





### **Quick Connect Interchangeable Fittings**

HIGH HEAT RESISTANT HARNESS: Available Lengths


- State-of-the-Art Technology
- Snap-In Place In Seconds
- Corrosion Resistant




### Inflatable Bladders Modules A & B

- One Size Expands and Contracts to Fit Multiple Pipe Sizes
- Spark Resistant Exterior Cover Does Not Melt
- Heavy-Duty Interior Inflatable Bag



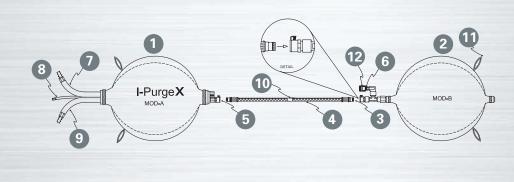





# I-Purge<sup>®</sup>X Features:

• Long Term, Reusable Solution

## **Proprietary Relief Valve** Technology

- Preset Relief Valve Allows for Precise Flow Rates
- Decreases The Risk Of Over-Inflation
- Low Profile Relief Valve Available on 2" and 3" Models



- 12" (305 mm) -- 24" (610 mm) 36" (914 mm) 48" (1219 mm)

72" (1828 mm)

Internal Hose and Protective External Fiberglass Sleeve Capable of Withstanding Temperatures up to 1200°F (650°C)

• Extended Length Harnesses Available to Accommodate Pre-heating and High Heat Applications

Flexible Bridge Harness Easily Navigates Through Pipes, Including Elbows & Tees Over 90°

Complete With Luminescent Indicator for Accurate Alignment at Root Gap

### **Patent-Pending Inert Gas Diffuser\***

- Disperses Inert Gas in all Reducing Turbulence
- Improves Weld Quality

# Tri-Flow Inner Tubing System (Blue, Black & Exhaust Hoses)

- Improves Efficiency of Gas Flow In & Out of Purge Area
- Separate Connections for:
- Inflation of Bladders, Flooding of Weld Zone with Inert Gas, Exhaust (Connects to Oxygen Monitor for O2 Analysis)
- Expedites Purging Process
- Optimum Seal Strength Achieved


## I-PURGEX ISOLATOR<sup>®</sup> INFLATABLE PIPE STOPPER & SINGLE PURGE BLADDER '-12'

- Accommodates a wide range of applications, including:
- » pipe system servicing, cleaning, inspection and sealing
- Industries:
- » Oil and Petrochemical
- » Water, Gas and Drainage
- » Construction

EASY TO USE. REQUIRES NO TOOLS. EXPANDABLE, EXTENDABLE & EXTRAORDINARY!

Directions Within the Weld Zone,

HEAT ZONE







Kink Resistant Hose Assures Continuous Gas Supply



- 1. Module A
- 2. Module B
- 3. Quick Connection to Module B
- 4. Stainless Steel Bridge Harness
- 5. Quick Connection to Module A
- 6. Relief Valve
- 7. Direct Purge (Black) Hose
- 8. Exhaust Monitor Connection
- 9. Inflation & Purge (Blue) Hose

PurgeX

- 10. Luminescent Indicator
- 11. Pull Loops
- 12. Gas Diffuser

- Bladder Expansion Technology Enables One Unit to Fit Multiple Pipe Sizes
- Unique Modular Design for a Customized Solution
- Easy Change and Replacement of Components
- Strong Pull Loops for Insertion and Removal
- Carrying Bag for Protection and Storage
- Manufactured in the USA from the Highest Quality Materials

